How to Set Arbitrary Low Design Radius

Road · https://mes100.com/docs/set-arbitrary-low-design-radius-mits-2-road-module/

By default setting, the minimum design radius will follow Arahan Teknik Jalan (ATJ) 8/86 or in software, you will see as JKR standard.

Spread Input

	ID	Design Standard	Design Speed, kph	Design Radius, m	Min. Radius, m	Spiral Length, m (for 2-lane road)		Min. Length of Spiral Curve, m
						In	Out	
1	IP1	Urban [U1]: Type II	30	35	30.000	0.000	0.000	28.500
2	IP2	Urban [U1]: Type II	30	35	30.000	28.500	28.500	28.500

To enable the minimum radius to be edited, you can change the minimum radius standards at Parameters >> Analysis >> Design >> Change minimum radius standards to none.

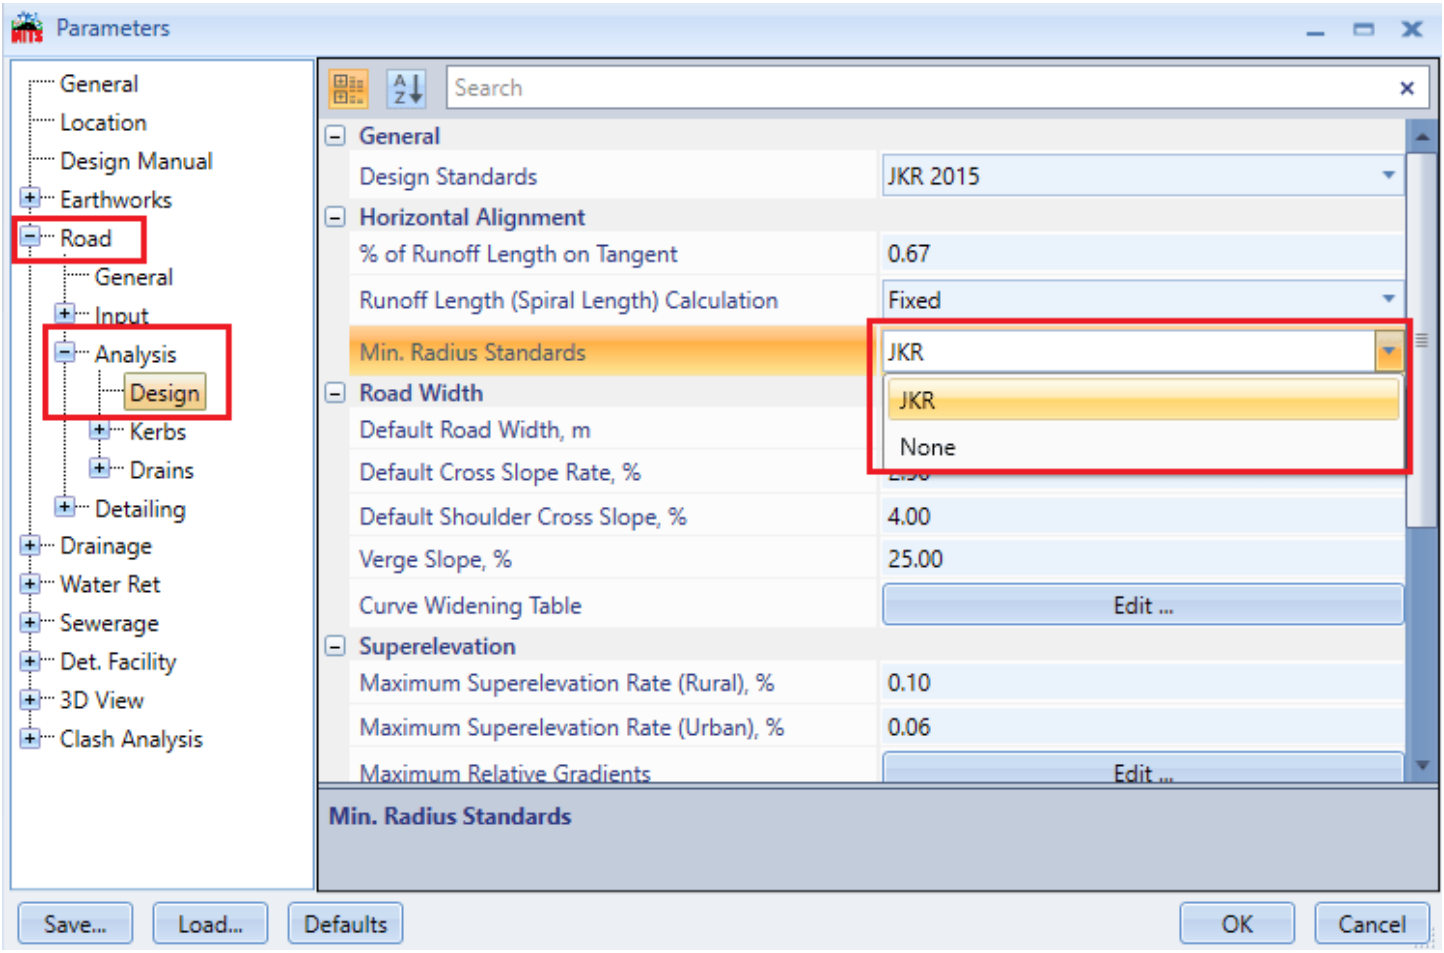

Related



Ngu Soon Hui

I’m the Benevolent Dictator for Life for MiTS Software cum Editor of this website. Read more here.

You can also contact me at soonhui@mes100.com